

Мощный расточной станок с возможностью исполнения по индивидуальному заказу

Данный станок является самым мощным расточным станком в своем классе. Вас приятно удивит его мощность и универсальность.

Элементы крепления являются эксклюзивными, запатентованными изделиями компании Climax. Они обеспечивают необходимую гибкость для выполнения сложных расточных работ даже в условиях ограниченного пространства.

Быстрая и простая настройка

- Быстрая и простая настройка за счет модульной конструкции.
- Быстрая и простая настройка с применением высококачественных литых конусов и сферических монтажных опор.
- Запатентованная конструкция сферических монтажных опор обеспечивает оперативность настройки с отклонением подшипника до 5°.
- Как правило, опытный оператор выполняет настройку за 30 минут или еще быстрее.

Мощность

- Крутящий момент на штанге составляет до 1600 Нм, что превосходит показатели любых других переносных расточных аппаратов с аналогичным диапазоном расточных работ.
- Специально разработанный вращающий привод обеспечивает изменение передаточного числа 4:1 или 12:1 для увеличения крутящего момента на любой скорости вращения.

Гибкость и высокое качество конструкции

- Конструкция обеспечивает возможность установки вращающего привода и механизма подачи в любой точке вдоль штанги, даже по отдельности.



- Запатентованная прочная конструкция сферических монтажных опор обеспечивает жесткую сцепку с обрабатываемым изделием для более эффективной обработки."

Универсальность

- Высокая адаптивность к различным требованиям.
- Станок предлагается с электродвигателем, сервомотором, гидравлическим двигателем или пневматическим двигателем.
- Реверсивный электрический мотор
- Быстрая и простая замена моторов
- Предусмотрены штанги различной длины: от 1219,2 до 7315,2 мм

- За счет различных комплектующих аппарат BB5000 может применяться для расточки глухих отверстий, совместной расточки, сверления, поверхностной обработки, нарезки резьбы, восстановления задвижек и кольцевого сверления.
- За счет монтажного комплекта обеспечивается крепление и быстрое выравнивание аппаратов AutoBoreWelder для эффективного выполнения расточно-наплавочных работ."

Компактность

- Предельная компактность для упрощения использования в условиях ограниченного пространства.
- Привод и подача могут быть установлены между подшипниками для использования в еще более стесненных условиях.

Характеристики

	US	Метрический
Рабочие диапазоны:		
Диаметр расточной штанги		
Стандарт	2.25 inches	57.2 мм
Опционально	1.75 inches	44.5 мм
Опционально	1.25 inches	31.8 мм
Диаметр растачивания		
Стандарт	2.5 - 12 inches	63.5 - 304.8 мм
Опционально	1.375 - 24 inches	34.9 - 609.6 мм
Ход	12, 24, or 36 inches	304.8, 609.6, или 914.4 мм
Мощность приводов		
Электрический: 8 to 160 об/мин	3.35 Hp	2.5 кВт
Серво: до 230 об/мин	4.7 Hp	3.5 кВт
Гидравлический:		
3,5 кВт HPU: до 148 об/мин	3.9 Hp	2.9 кВт
7,5 кВт HPU: до 250 об/мин	6.5 Hp	4.8 кВт
Пневматический: до 120 об/мин	3.0 Hp	2.2 кВт
Монтажные опоры	Одноплечевая опора, двухплечевая опора, универсальная опора, опора с раскреплением во внутреннем диаметре	
Редуктор вращения	4:1 передаточное число редуктора	
Набор центрующих конусов	Опционально 12:1 передаточное число	
Стандарт	2.75 - 12 inches	70.0 – 304.8 мм
Опционально	1.375 - 5 inches	34.9 – 127.0 мм
Подача	Mechanical	Механическая
Скорость подачи (регулируемая и реверсивная)	0 – 0.018 inches/rev.	0 – 0.46 мм/об.
Весовые характеристики		
Типичный вес станка (с одноплечевыми опорами, набором конусов и гидравлическим мотором)	444 lbs	201 кг
Приблизительный вес расточной штанги (Включая металлический контейнер)	1.48 lbs/inch	0.264 кг/см
Упаковочные размеры (Упаковывается в 2 контейнера, 3 контейнер для гидравлической насосной станции (ГНС))		
Станок Д, Ш, В	52.5 x 27 x 16.5 inches	1334 x 686 x 419 мм
Штанга 72 inch (1828.8 мм) Д, Ш, В	74.5 x 6.5 x 7 inches	1892 x 165 x 178 мм
ГНС [3,5 или 7,5 кВт] Д, Ш, В	49.5 x 30.5 x 41 inches	1257 x 775 x 1041 мм

All dimensions should be considered reference. Contact your CLIMAX Representative for precision dimensions. Specifications are subject to change without notice. There are no systems or components on this machine that are capable of producing hazardous EMC, UV or other radiation hazards. The machine does not use lasers nor does it create hazardous materials such as gasses or dust.

SETUP AND OPERATION


A Fast Six-Step Process

Setup of the BB5000 Portable Boring Machine is quick and easy. An experienced operator can set up the machine in most typical two-bore line boring applications in about half an hour (depending on alignment tolerances). The three main ingredients of the quick setup system are:

- Setup cones to roughly center the bar in the bore.
- Spherical mounts that can be quickly tack-welded in place.
- Quick-mount rotational drive unit, attaches to spherical mount in seconds

1 Slide the bar through the two holes to be bored and roughly center it with the set-up cones. The set-up cones are forced into the bore with the clamp ring jacking screw and locked onto the bar with a set screw.

Elapsed time: 4 minutes.

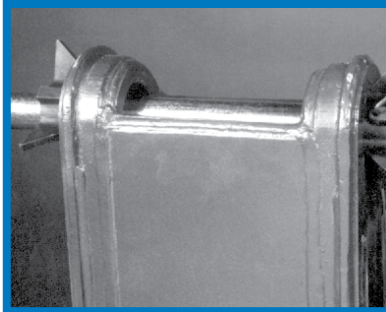


4 Slide the rotational drive onto the bar. Firmly push it onto the spherical mount, and lock it in place with one bolt. Tighten the rear clamping collar enough to be snug but so the bar can slide through it.

Elapsed time: 4 minutes.




2 Slide on spherical mounts with tack weld plates, and tack weld them to the workpiece. These mounts have spherical bearings so they can be mounted up to 5° out of perpendicular alignment.

Elapsed time: 10 minutes.

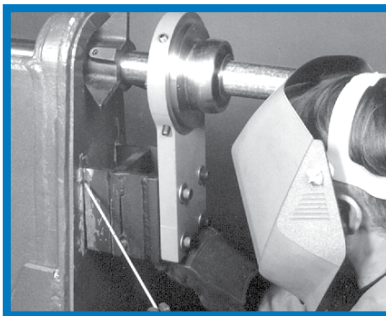

5 The axial feed unit is slipped onto the bar and the leadscrew is screwed into the pocket on the rotational drive unit. Tightening two clamping collars locks the axial feed unit to the bar.

Elapsed time: 3 minutes.

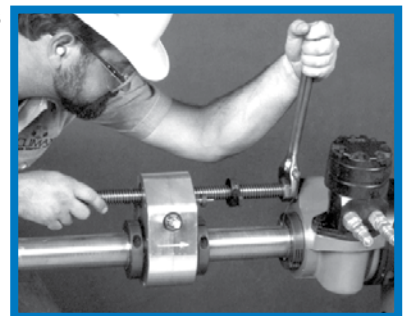

3 Remove the set-up cones and replace the bar. The set-up cones will adequately center the bar, unless you have very precise tolerances, or need to move the centerline of the bore slightly. Final centering adjustments are made with the jacking screws.


Elapsed time: 5 minutes.



6 Insert a properly ground tool bit into the tool hole in the bar, adjust for depth of cut, and lock in place with the set screw. Connect to power source. Elapsed time: 5 minutes.



And there you are... ready to begin the first boring pass.

Total elapsed time: 31 minutes.

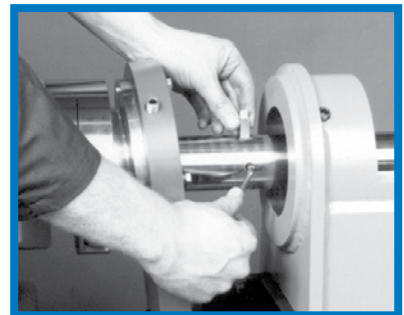


OPERATIONAL DIMENSIONS


Dimensions in Inch (mm)

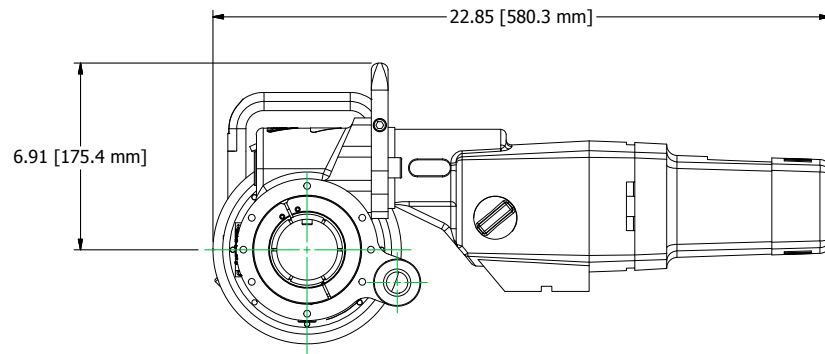

Rotational drive unit with electric motor

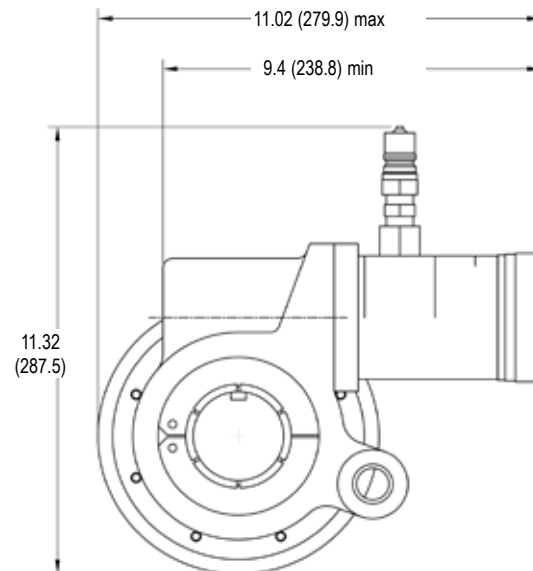


Rotational drive unit with hydraulic motor

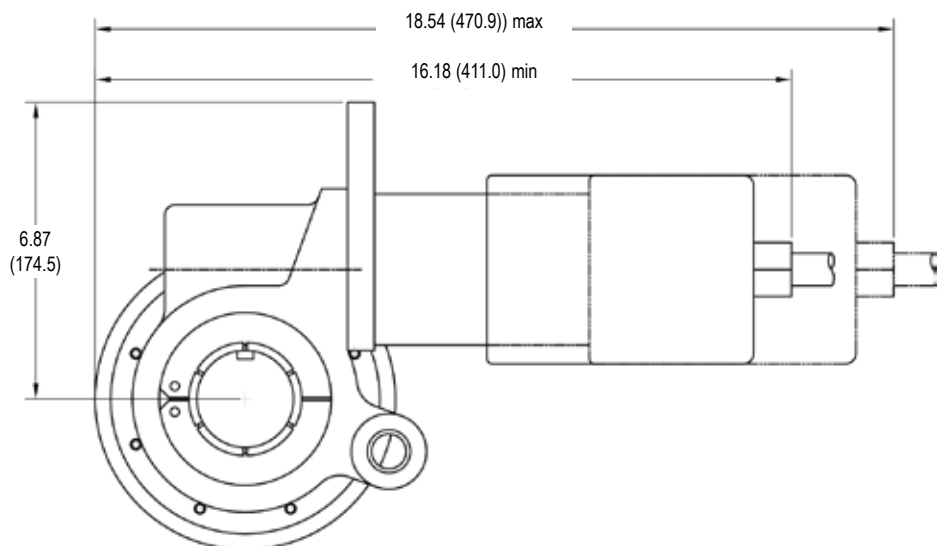


Rotational drive unit with pneumatic motor


OPERATIONAL DIMENSIONS

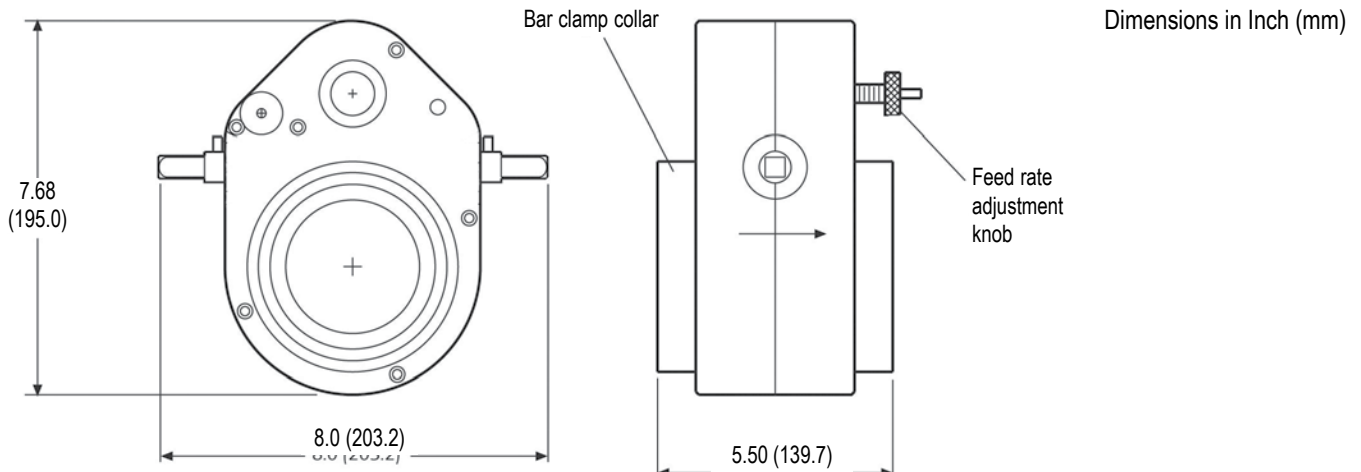

Axial feed unit

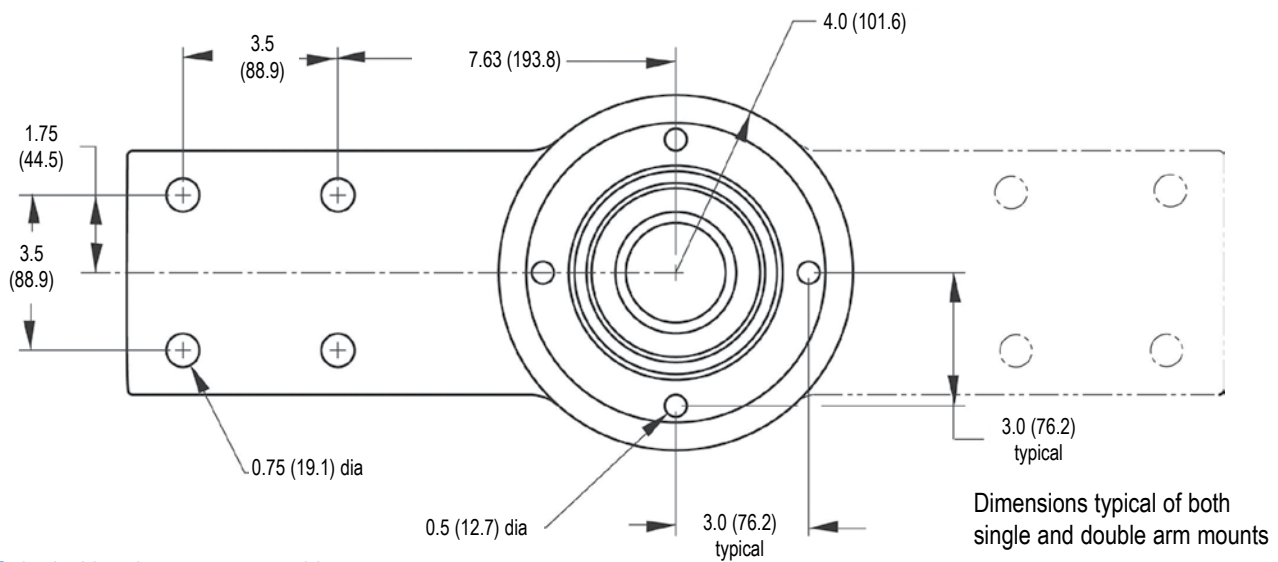


Spherical bearing mount assembly

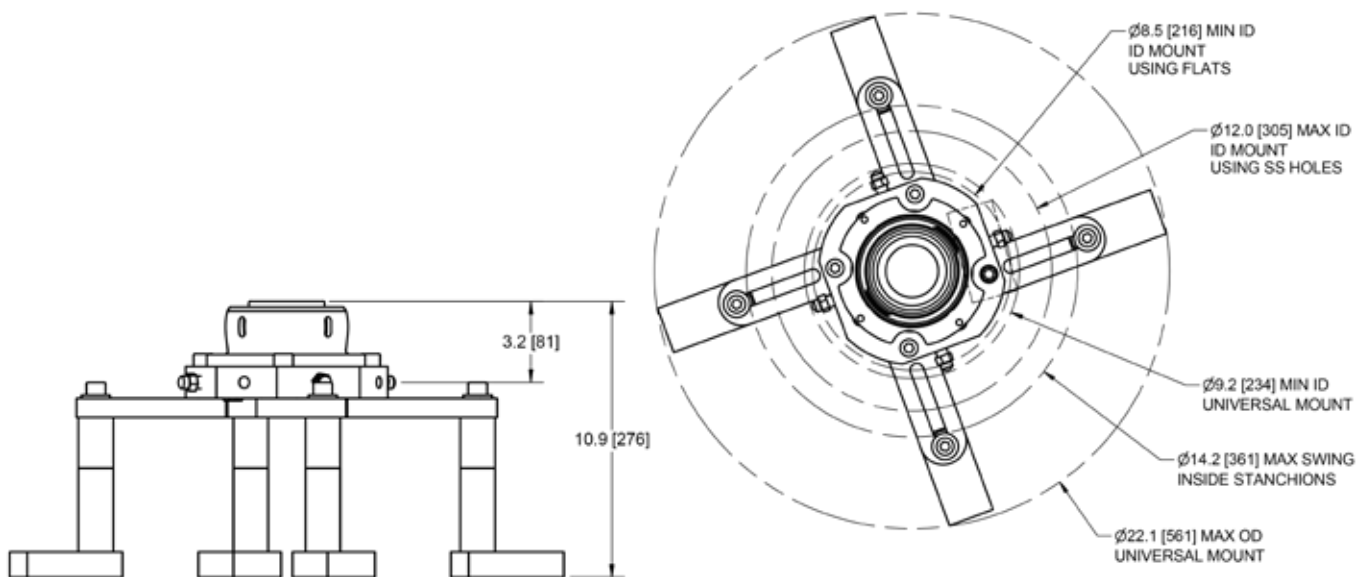

Universal bearing mount assembly

TOOL CONFIGURATIONS

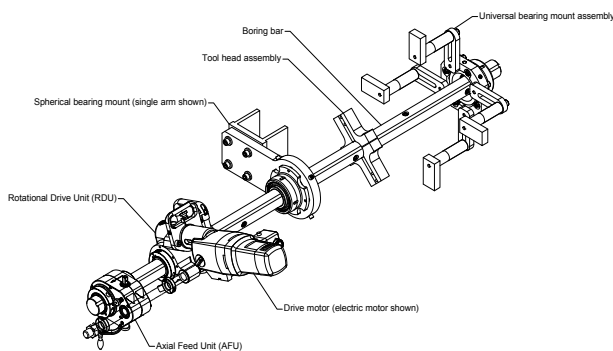


Configure your BB5000 in 8 easy steps:

- 1 Select a Base Unit
- 2 Select a Boring Bar
- 3 Select a Drive Motor Option
- 4 Select a Speed Control
- 5 Select a Leadscrew
- 6 Select Setup Cones
- 7 Select a Mounting Option
- 8 Select Optional Small Bore Kit

To generate the correct part number for the boring machine you require, simply select the part number needed in each step, and contact your CLIMAX representative.


1 Base Unit

(Includes RDU, AFU, Tool Heads, Tool Kit, Operator's Manual and Compartmentalized Metal Container)

	Inch Base Unit, 4:1 RDU	49003
	Metric Base Unit, 4:1 RDU	49004
	Inch Base Unit, 12:1 RDU for Servo	54499
	Metric Base Unit, 12:1 RDU for Servo	54501

2 Boring Bar (Inch)

Bars are 2-1/4 inch diameter, chrome-plated steel with full length keyway.

	48 inch bar, 1/2 inch tooling holes every 6 inches	39309
	72 inch bar, 1/2 inch tooling holes every 6 inches	39310
	96 inch bar, 1/2 inch tooling holes every 6 inches	41552
	120 inch bar, 1/2 inch tooling holes every 6 inches	43728
	144 inch bar, 1/2 inch tooling holes every 6 inches	43729
	48 inch bar, 1/2 inch tooling holes every 10 inches	34626
	72 inch bar, 1/2 inch tooling holes every 10 inches	34627
	96 inch bar, 1/2 inch tooling holes every 10 inches	34628
	120 inch bar, 1/2 inch tooling holes every 10 inches	34629
	144 inch bar, 1/2 inch tooling holes every 10 inches	34630

*Multiple units may be ordered.

Boring Bar (Metric)

Bars are 2-1/4 inch diameter, chrome-plated steel with full length keyway.

1219.2 mm bar, 12 mm tooling holes every 152.4 mm	43740
1828.8 mm bar, 12 mm tooling holes every 152.4 mm	43741
2438.4 mm bar, 12 mm tooling holes every 152.4 mm	43742
3048.0 mm bar, 12 mm tooling holes every 152.4 mm	43743
3657.6 mm bar, 12 mm tooling holes every 152.4 mm	43744
1219.2 mm bar, 12 mm tooling holes every 254.0 mm	34635
1828.8 mm bar, 12 mm tooling holes every 254.0 mm	34636
2438.4 mm bar, 12 mm tooling holes every 254.0 mm	34637

Boring Bar (Metric), continued

3048.0 mm bar, 12 mm tooling holes every 254.0 mm

34638

3657.6 mm bar, 12 mm tooling holes every 254.0 mm

34639

*Multiple units may be ordered.

3 Drive Motor



Electric:

120 VAC, 50/60 Hz, 8/160 bar rpm, 4 speed reversible, CE

82113

230 VAC, 50/60 Hz, 8/160 bar rpm, 4 speed reversible, CE

82114

Servo Electric

230V (12:1 RDU) CE

56026

460V (12:1 RDU) CE

56027

Hydraulic:



Motor Capacity		Max Bar RPM at		Torque at Bar, - Calculated - ft-lbs, (N·m)	Part No. Motors with 60 Series QD Fittings	Part No. Motors with ISO 16028 QD Fittings
in ³	cm ³	6 gpm (22.7 L/min)	10 gpm (37.9 L/min)			
2.2	36	148	246	92 (124.7)	39837	65384
3.6	59	90	150	159 (215.6)	39843	63425
5.7	93.4	55	92	270 (367)	39844	63429
7.3	119.6	44	73	342 (463.7)	39845	69434
8.9	145.8	36	60	417 (565.4)	39846	69435
11.3	185.2	28	49	478 (648.1)	43451	69436
14.1	231.1	23	38	652 (884.0)	39847	69438
17.9	293.3	17	30	764 (1035.8)	43452	69439

Pneumatic (3 Hp (2.2 kW) includes pneumatic conditioning unit):

57 rpm 234 ft-lbs (317.3 N·m) non-CE

37498

120 rpm 115 ft-lbs (155.9 N·m) non-CE

39112

* Multiple units may be ordered.

4 Control Box



120V Controller, 50 Hz, CE

82203

120V Controller, 60 Hz, CE

82202

230V Controller, 50 Hz, CE

81281

— 230V Controller, 60 Hz, CE

82198

5 Leadscrew



12 inch (304.8 mm) leadscrew

28654

24 inch (609.6 mm) leadscrew

28687

36 inch (914.4 mm) leadscrew

28688

* Multiple units may be ordered.

6 Setup Cones (cast iron, for 2-1/4 inch dia. bars)



Small setup cones (2.75 - 8.37 inches)

26507

Large setup cones (8.37 - 12 inches)

26508

Full set of setup cones (2.75 - 12 inches)

26383

7 Mounting Option

Single arm mount (1) (for 2-1/4 inch dia. bars)

37472

Double arm mount (1) (for 2-1/4 inch dia. bars)

37473



Universal mount (1) (for 2-1/4 inch dia. bars)

36959

ID mount (1) (for 2-1/4 inch dia. bars)

46293

* Multiple units may be ordered.



ID mount



NOTE: Drawings are for reference only, are not to scale, and may not represent actual product.

TOOL CONFIGURATIONS

8 Optional Small Bore Components

If selecting Small Bore components, please select from the following. Bars selected separately.

AFU & RDU Collets & Drive Key



Collets for 1-1/4 inch bar (inch)	48999
Collets for 1-1/4 inch bar (metric)	49000
Collets for 1-3/4 inch bar (inch)	49001
Collets for 1-3/4 inch bar (metric)	49002

1-1/4 inch Boring Bar for Kit (inch)

36 inch bar, 3/8 inch tooling holes every 6 inches	40925
48 inch bar, 3/8 inch tooling holes every 6 inches	39308
72 inch bar, 3/8 inch tooling holes every 6 inches	43693
96 inch bar, 3/8 inch tooling holes every 6 inches	39447
48 inch bar, 3/8 inch tooling holes every 10 inches	37337
72 inch bar, 3/8 inch tooling holes every 10 inches	37338
96 inch bar, 3/8 inch tooling holes every 10 inches	37339
120 inch bar, 3/8 inch tooling holes every 10 inches	37340
144 inch bar, 3/8 inch tooling holes every 10 inches	37341

* Multiple units may be ordered.

1-1/4 inch Boring Bar for Kit (metric)

914.4 mm bar, 10 mm tooling holes every 152.4 mm	43688
1219.2 mm bar, 10 mm tooling holes every 152.4 mm	43687
1828.8 mm bar, 10 mm tooling holes every 152.4 mm	43686
2438.4 mm bar, 10 mm tooling holes every 152.4 mm	43685
1219.2 mm bar, 10 mm tooling holes every 254.0 mm	37327
1828.8 mm bar, 10 mm tooling holes every 254.0 mm	37328
2438.4 mm bar, 10 mm tooling holes every 254.0 mm	37329
3048.0 mm bar, 10 mm tooling holes every 254.0 mm	37330
3657.6 mm bar, 10 mm tooling holes every 254.0 mm	37331

* Multiple units may be ordered.

1-3/4 inch Boring Bar for Kit (inch)

36 inch bar, 1/2 inch tooling holes every 6 inches	43288
48 inch bar, 1/2 inch tooling holes every 6 inches	43311
60 inch bar, 1/2 inch tooling holes every 6 inches	43312
72 inch bar, 1/2 inch tooling holes every 6 inches	43313
96 inch bar, 1/2 inch tooling holes every 6 inches	43314
48 inch bar, 1/2 inch tooling holes every 10 inches	43318
60 inch bar, 1/2 inch tooling holes every 10 inches	43319
72 inch bar, 1/2 inch tooling holes every 10 inches	43320
96 inch bar, 1/2 inch tooling holes every 10 inches	43321
120 inch bar, 1/2 inch tooling holes every 10 inches	43322
144 inch bar, 1/2 inch tooling holes every 10 inches	43323

* Multiple units may be ordered.

1-3/4 inch Boring Bar for Kit (metric)

914.4 mm bar, 12 mm tooling holes every 152.4 mm	43297
1219.2 mm bar, 12 mm tooling holes every 152.4 mm	43298
1524.0 mm bar, 12 mm tooling holes every 152.4 mm	43299
1828.8 mm bar, 12 mm tooling holes every 152.4 mm	43300
2438.4 mm bar, 12 mm tooling holes every 152.4 mm	43301
1219.2 mm bar, 12 mm tooling holes every 254.0 mm	43305
1828.8 mm bar, 12 mm tooling holes every 254.0 mm	43306
1524.0 mm bar, 12 mm tooling holes every 254.0 mm	43307
2438.4 mm bar, 12 mm tooling holes every 254.0 mm	43308
3048.0 mm bar, 12 mm tooling holes every 254.0 mm	43309
3657.6 mm bar, 12 mm tooling holes every 254.0 mm	43310

* Multiple units may be ordered.

3/8 inch Tooling Kits (for 1-1/4 inch bars)

HSS 0 degree and 15 degree lead angles (3 lengths) 0.98, 1.3 and 1.8 inches	37502
HSS 15 degree lead angle (3 lengths) 1.3, 1.8 and 2.2 inches	49008
Cemented carbide 0 and 15 degree lead angle	49009
Cemented carbide 15 degree lead angle (3 lengths) 1.3, 1.8 and 2.2 inches	49010

10 mm Tooling Kits

HSS 0 degree and 15 degree lead angles (3 lengths) 25, 33 and 46 mm	49011
HSS 15 degree lead angle (3 lengths) 25, 33 and 46 mm	49012

Small Bore Kit Bearing Collets



1-1/4 inch (31.8 mm) bearing collet (each)	26719
1-3/4 inch (44.5 mm) bearing collet (each)	26722

Small Bore Kit Setup Cones

For 1-1/2 to 3-1/4 inch (38.1 to 82.6 mm) - aluminum	26263
For 1-3/4 inch (44.5 mm) bar - cast iron	43383

Small Bore Components for Your BB5000:

Small Bore Kits Without Bars

60654	1-1/4 inch diameter small bore kit includes the following: 48999 RDU collet with drive key, AFU collet 26719 (4) bearing collets 26263 set of aluminum set up cones
60630	1-1/4 inch diameter small bore kit includes the following: 48999 RDU drive collet with drive key, AFU collet 26719 (4) bearing collets 26263 set of aluminum set up cones 26656 1-1/4 inch alignment tool for BoreWelder
63933	1-3/4 inch diameter small bore kit includes: 49001 RDU collet with drive key & AFU collet 26722 (4) bearing collets 43383 Small cast iron set up cones for 1-3/4 inch bar
63934	1-3/4 inch diameter small bore kit includes: 49001 RDU collet with drive key & AFU collet 26722 (4) bearing collets 43383 Small cast iron set up cones for 1-3/4 inch bar 36062 1-3/4 inch alignment tool for BoreWelder

Sleeve Sets



Include rotational drive collet with drive key, axial feed collet, and two bearing collets (every bearing requires a collet). All collets include retaining snap rings.

28698	1-1/4 inch (31.8 mm) diameter small bore collet set (for use with 2-1/4 inch (57.2 mm) diameter components). RDU collet with drive key, AFU collet, (2) bearing collet.
44614	1-1/4 inch (31.8 mm) diameter small bore collet set (for use with 2 inch (50.8 mm) diameter components.) RDU collet with drive key, AFU collet, (2) bearing collet
44091	1-3/4 inch (44.5 mm) diameter small bore collet set (for use with 2-1/4 inch (57.2 mm) diameter components) RDU collet with drive key, AFU collet, (2) bearing collet

Other Small Bore Components

26263	Set of (2) aluminum set-up cones, 1.5 - 3.25 inch (38.1 - 82.6 mm) diameter, for 1-1/4 inch (44.5 mm) diameter bar
43383	Set of (2) cast iron set-up cones, 2.0 - 6.0 inch (50.8 - 152.4 mm) diameter, for 1-3/4 inch (31.8 mm) diameter bar
26719	(2) bearing collets for 1-1/4 inch dia. bar
26722	(2) bearing collets for 1-3/4 inch dia. bar
26728	snap ring for 2-1/4 inch (57.2 mm) diameter components
31612	Snap ring for 2 inch (50.8 mm) diameter components
28699	RDU collet with key for 1-1/4 inch diameter bar
28989	RDU collet with key for 1-3/4 inch diameter bar
36317	RDU collet for 2 inch diameter bar
26720	AFU collet for 1-1/4 inch diameter bar
26723	AFU collet for 1-3/4 inch diameter bar
36312	AFU collet for 2 inch diameter bar

Configurations shown represent standard options. Please contact us for special fixturing, CNC Control options, or other features that may be needed for your specific machining application. We look forward to working with you!

No. Description

Automated Bore Welders

Add an Automated Bore Welder to your BB5000 Boring Machine with the convenient bore welder interface kit.


Attach the bore welder to the BB5000's mounting fixture to ensure perfect alignment for both welding and machining.

A single setup for both welding and machining saves time, and helps get the job done quickly. (All bore welders include welding head, torches, mounting rod & radial mount, torch extensions, conduit switch assembly, tips, nozzles, diffuser, and liner. See table below to compare other features & components.)


BoreWelding Interface Kit

See the CLIMAX BoreWelder product literature for details.

- 26518** Complete interface kit for 2-1/4 inch (57.2 mm) diameter bar.
- 36062** Alignment tool only for 1-3/4 inch (44.5 mm) diameter bar.
- 26656** Alignment tool only for 1-1/4 inch (31.8 mm) diameter bar.




BW1000 AutoBoreWelder

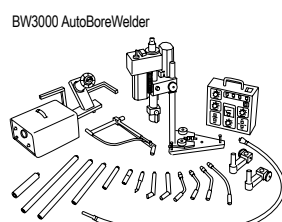

BW3000 AutoBoreWelder

Model	Welding Dia. Inch (mm)	Facing Torch Option	Wire Feeder Included	Auto-Skip Included
BW1000	0.88 - 12.0 (22.4 - 304.8)	No	No	No
BW3000	0.88 - 13.0 (22.4 - 330.2)	Yes	Yes	Yes

Mechanical Axial Feed Assembly



Mounts anywhere on the bar. Reversible ratchet feed mechanism has variable feed rate up to 0.19 inches (0.48 mm) per revolution. Feeds the tool and bar by moving along the stationary leadscrew. Adjustable clamp collars on both ends clamp unit to the bar. Includes auto stop.

- 28636** For 2-1/4 inch (57.2 mm) diameter bar.
- 29908** For 2.0 inch (50.8 mm) diameter bar

Rotational Drive Assembly

Mounts anywhere on the bar. Features heavy-duty cast aluminum housing, Timken roller bearings, and sealed, lifetime lubrication. Clamp ring mounts assembly to spherical bearings with one bolt.

Part No.	Generation	Worm Gear Reduction	Accepts Bar Dia.	Key Size
49684	4th	4:1	2-1/4 inch	3/8 inch
29910	3rd	4:1	2 inch	1/4 inch
65620	4th	4:1	2 inch	1/4 inch
34028	3rd	4:1	2 inch	8 mm
65678	4th	4:1	2 inch	8 mm
53165	4th	12:1	2-1/4 inch	3/8 inch

NOTE: Drawings are for reference only, are not to scale, and may not represent actual product.

No. Description

Electric Motor Assembly



Assembly includes four-speed variable electric motor and mounting flange.


- 82113** 120 VAC, 50/60 Hz, 8/160 bar rpm, 4 speed reversible, CE.
- 82114** 230 VAC, 50/60 Hz, 8/160 bar rpm, 4 speed reversible, CE

Control Box



- 82203** 120V Controller, 50 Hz, CE
- 82202** 120V Controller, 60 Hz, Non-CE
- 81281** 230V Controller, 50 Hz, CE
- 82198** 230V Controller, 60 Hz, Non-CE


Electric Servo Motor Assembly



Compact, lightweight servo drive system provides 3 - 230 RPM of variable speed and up to 443.7 ft-lbs (601.2 N•m) of torque at the bar, providing the power of a hydraulic power unit in a ultra quiet, quick to set up package. Includes 12:1 RDU.

- 54321** Electric servo motor, 230V, CE compliant t
- 52876** Electric servo motor, 460V, CE compliant

Hydraulic Motor Assembly



Reversible hydraulic motor and SAE 2-bolt mounting flange to mount to the rotational drive housing.


Motor ports are 7/8 - 14 SAE O-ring type. 1/2 inch dripless quick-connect fitting kit installed.

Bar rpm's are max at 6 gpm (22.7 L/min). (For 50 Hz power units, reduce the bar rpm by 15%; bar torque remains the same.) Also available with 3/8 inch (9.5 mm) fitting kits.

Part No.	Part No.	Motor Capacity		Max bar rpm at		Torque at the bar (calculated value)
		in ³	cm ³	6 gpm (22.7 L/min)	10 gpm (37.9 L/min)	
39837	65384	2.2	36	148	246	92 ft-lb (124.7 N•m)
39843	63425	3.6	60	90	150	159 ft-lb (215.6 N•m)
39844	63429	5.9	96.7	55	92	270 ft-lb (367 N•m)
39845	69434	7.3	119.6	44	73	342 ft-lb (463.7 N•m)
39846	69435	8.9	145.8	36	60	417 ft-lb (565.4 N•m)
43451	69436	11.3	185.2	28	49	478 ft-lb (648.1 N•m)
39847	69438	14.1	231.1	23	38	652 ft-lb (884.0 N•m)
43452	69439	17.9	293.3	17	30	764 ft-lb (1035.8 N•m)

Hydraulic Power Unit

Available 5 Hp (3.7 kW) 6 gpm (22.7 L/min) and 10 Hp (7.5 kW) 10 gpm (37.9 L/min) units with 3-phase electric motor, with variable displacement pump, allow speed control without sacrificing torque.



Many models available. Please ask a CLIMAX representative for details.

Pneumatic motor assembly




The 3 Hp (2.2 kW) motor comes complete, ready for 2-bolt mounting directly on the rotational drive.

Does not include pneumatic conditioning unit.

Part number	Max Bar RPM	Torque at the bar (calculated value)
28614 (CE)	120 rpm	115 ft-lb (155.9 N•m)
28697 (CE)	57 rpm	234 ft-lb (317.3 N•m)

No. Description



Axial leadscrew assembly

Stationary leadscrew assembly is fixed in position by screwing it into the rotational drive assembly or into tack weld mounting block. Acme nut holds leadscrew in place. Includes leadscrew and two Acme nuts.

Leadscrews available in lengths below. Other lengths available by request.

28654	12 inch (304.8 mm) travel
28687	24 inch (609.6 mm) travel
28688	36 inch (914.4 mm) travel
39335	48 inch (1219.2 mm) travel
28756	Leadscrew tack weld block




Set-up cones

Cones slide onto the bar and into fairly round, in-line holes for fast set-up. Set screws and back-up clamp collars hold the cones in place while the components are being attached.

26263	Set of 2 aluminum set-up cones, 1.5 - 3.25 inch (38.1 - 82.6 mm) bore ID. Fit 1-1/4 inch (31.8 mm) diameter bars.
26507	Set of 2 cast iron set-up cones for 2.75 - 8.37 inch (69.9 - 212.6 mm) bore ID. Fit 2-1/4 inch (57.2 mm) diameter bars.
26508	Set of 2 cast iron set-up cones for 8.37 - 12 inch (212.6 - 304.8 mm) bore ID. Fit 2-1/4 inch (57.2 mm) diameter bars.
26383	Full set of cast iron set-up cones for 2.75 - 12 inch (69.9 - 304.8 mm) bore ID. Fit 2-1/4 inch (57.2 mm) diameter bars.
31801	Set of 2 cast iron set-up cones for 2.75 - 8.37 inch (69.9 - 212.6 mm) bore ID. Fit 2 inch (50.8 mm) diameter bars.
31802	Set of 2 cast iron set-up cones for 8.37 - 12 inch (212.6 - 304.8 mm) bore ID. Fit 2 inch (50.8 mm) diameter bars.

Spherical bearing mounts

Available in single arm, double arm, and universal mount styles, our spherical bearing mounts attach directly to the work piece, and accept both the model BB5000 rotational drive, and the mounting bracket for the CLIMAX AutoBoreWelders. Includes bracket, bearing, and hardware.

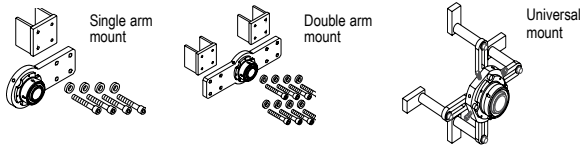

Single arm bearing mount

37472	for 2-1/4 inch (57.2 mm) bars
36710	for 2 inch (50.8 mm) bars

Double arm

37473	for 2-1/4 inch (57.2 mm) bars
29953	for 2 inch (50.8 mm) bars

Universal

36959	for 2-1/4 inch (57.2 mm) bars
63535	Universal arm 24 inch (609.6 mm) extension kit
37626	ID Mount, for 8.6 - 11.2 inch (218.4 - 284.5 mm) diameter.
37621	Universal mount ID conversion kit

Spherical bearing



26248	Spherical Bearing - 2-1/4 inch (57.2 mm). Bearing mounts to bracket to align the bar.
29951	Spherical Bearing - 2 inch (50.8 mm). Same as above, but for 2.0 inch (50.8 mm) diameter. Order mounting hardware separately.

Face-adjustable ID bearing mount



46293 Ideal for mounting the BB5000 in deep or blind bores, this ID bearing mount provides an ID mounting range of 5.75 - 12.5 inches (146.1 - 317.5 mm). Easily install and adjust the mount from the open face part of your bore. Independently adjustable mounting legs also simplify centering the mount in bores which are not perfectly round.

46227 1.5 inch extension jaw to extend reach (need 4)

No. Description

ID mount self-aligning bearing support assembly

20319 Bearing support assembly provides 4-way adjustable bar alignment. Fits bores with ID's from 11.5 - 24 inches (292.1 - 609.6 mm). Bar is held in place by a self-aligning bearing. Assembly includes chuck and bearing, three sets of jaws, two sets of jacking screws, and one set of 1 inch (25.4 mm) spacers.



Cantilever mounting assembly

28799 Cantilever standoff mounts between two bearing mounting brackets to ensure machine rigidity when blind boring, trepanning, spade drilling, or tapping. Order bearing mounting brackets separately. Order two assemblies when using a double arm mount.



Accessories for Drilling and Blind Hole Boring

Turn your BB5000 into a powerful drilling system with the following accessories. A wide array of options available, please talk to us about your needs - we can customize a package to fit your specific need.

57140 Drill Base



Includes drill stand with grip tight bearing, tack weld spacers and all hardware. Customer will need to order #4 or #5 Morse Taper or straight shank bar (1), single arm bearing mount and drill tooling as well as BB5000 drive and feed to make a complete drill package

Morse Taper and Straight shank bars

CLIMAX sells special bars for drilling and blind hole boring. Options include #4 and #5 Morse Taper and bars with Morse Taper on one end and 1.25" straight shank on the opposite end. For most applications we recommend the #4 Morse Taper. The majority of our drilling and blind hole boring tooling is supplied with #4 Morse Taper.

2-1/4 Inch (57.2 mm) diameter Bars for Drilling and Blind Hole Boring				
Bar Length Inch (mm)	#4 Morse Taper only	#4 Morse Taper and straight Shank	#5 Morse Taper only	#5 Morse Taper and Straight Shank
24 (609.6)	58828		19282	18715
36 (914.4)	36114	61459	19283	18716
48 (1219.2)	38277	61502	19284	18717
60 (1524.0)	58827		19285	18718
72 (1828.8)	36113	61503	21131	58820
96 (2438.4)	38278	61504	19286	58821
144 (3657.6)	34200			

56524 Coolant Mister



Supplies Cooling Mist Directly to the Cutting Edge through the Super Drill or Allied Machine & Tool RCA (Rotary Coolant Adapter)

59804 New-Lube Coolant, 1 gallon

Super Drill


57629	Kit A1 1.968 - 2.165 inches (50 - 55 mm) #4 Morse taper
57647	Kit A2 2.165 - 2.559 inches (55 - 65 mm) #4 Morse taper
57652	Kit B 2.559 - 3.149 inches (65 - 80 mm) #4 Morse taper
57661	Kit C 3.149 - 3.937 inches (80 - 100 mm) #4 Morse taper
57667	Kit D 3.937 - 4.724 inches (100 - 120 mm) #4 Morse taper
57692	SBG Sharpening Fixture

See the CLIMAX Drilling & Blind Hole Boring supplement for a complete listing of insert, drill components and accessories.

Criterion

59767	CB-203D 3 inch (76.2 mm) diameter boring head kit
59768	CB-204D 4 inch (101.6 mm) diameter boring head kit

NOTE: Drawings are for reference only, are not to scale, and may not represent actual product.

								
Climax PN	31412	30051	30044	35858	36936	36954	45040	60301
Item Name	Adjustable Range Facing Heads			Facing & Grooving Heads			Heavy Duty Facing Head	
Bar Dia.	1-¼ (31.8)	2.0 (50.8)	2-¼ (57.2)	1-¾ (44.5)	2-¼ (57.2)	2-¼ (57.2)	2-¼ (57.2)	2.0 (50.8 mm)
Swing Dia.	6.6 - 9.4 (167.6 - 238.8)	9.1 - 22.2 (231.1 - 563.9)	10.0 - 18.6 (254 - 472.4)	13.5 (342.9)	13.5 (342.9)	20.3 (515.6)	20.1 - 25.3 (510.5 - 642.6)	
Facing Dia.	2.1 - 8.8 (53.3 - 223.5)	2.5 - 18 (63.5 - 457.2)	2.5 - 18 (63.5 - 457.2)	2.5 - 12 (63.5 - 304.8)	2.5 - 12 (63.5 - 304.8)	2.5 - 19.0 (63.5 - 482)	2.25 - 24.0 (57.2 - 609.6)	
Grooving Dia.	n/a	n/a	n/a	3.5 - 12 (88.9 - 304.8)	4.0 - 12.0 (101.6 - 304.8)	4.0 - 19.0 (101.6 - 482.6)	3.3 - 24.0 (83.8 - 609.6)	

No.	Description	No.	Description
Bore Measuring Tool  Features a fine adjustment feature which allows precision bore measurement and sets tool bit height while the bar is still mounted in the work piece. 70645 Mounts on any bar from 1-¼ to 2-½ inches (31.8 to 57.2 mm) in diameter. Measures up to 12 inches (304.8 mm) diameter bores. 67487 Mounts on any bar from 1-¼ to 2-½ inches (31.8 to 57.2 mm) in diameter. Measures up to 24 inches (609.6 mm) diameter bores.		Tool Bits HSS standard tool bits (inch) 31866 ½ inch x 1.0 inch LH 15° lead* 31857 ½ inch x 1.0 inch LH 0° lead* 31867 ½ inch x 1.8 inches LH 15° lead* 31858 ½ inch x 1.8 inches LH 0° lead* 32344 ½ inch x 2.5 inches LH 15° lead* 32342 ½ inch x 2.5 inches LH 0° lead* 31868 ½ inch x 4.0 inches LH 15° lead 31859 ½ inch x 4.0 inches LH 0° lead 25710 ½ inch x 2.5 inches LH & RH double-ended	
Magnetic Back Dial Indicator  Top quality travel dial indicator with magnetic back, made by Starrett® for CLIMAX. Useful for many things including: - Precisely setting depth of cut. - Measuring and setting boring bar travel when cutting to a shoulder. - Facing operations, precision alignment of boring bar to larger bores. 45396 0 - .500 inch range (.001 increment) - white face 45397 0 - 10 mm range (.01 mm increment) - yellow face		HSS Tool Bits (Metric) 34574 HSS 12 mm x 1.0 inches (25.4 mm) LH 0° lead** 34578 HSS 12 mm x 1.8 inches (45.7 mm) LH 15° lead** 34579 HSS 12 mm x 1.0 inches (25.4 mm) LH 0° lead** 34573 HSS 12 mm x 1.8 inches (45.7 mm) LH 0° lead** 34577 HSS 12 mm x 2.5 inches (63.5 mm) LH 15° lead** 34572 HSS 12 mm x 2.5 inches (63.5 mm) LH 0° lead** 34576 HSS 12 mm x 4.0 inches (101.6 mm) LH 15° lead 34571 HSS 12 mm x 4.0 inches (101.6 mm) LH 0° lead	
Digital Bore Measuring Caliper  Get an accurate reading of the bore without removing the bar. Features locking, micro-adjust slide. 61707 Measures up to 10 inches (254.0 mm) ID/OD 63330 Measures up to 24 inches (609.6 mm) ID/OD		Alternative Tool Bits 31848 HSS ½ inch x 1.0 inch RH 15° lead 31830 HSS ½ inch x 1.0 inch RH 0° lead 32103 HSS ½ inch x 1.0 inch RH 0° lead side cutting 32114 HSS ½ inch x 1.0 inch LH 0° lead side cutting 31849 HSS ½ inch x 1.8 inch RH 15° lead 31831 HSS ½ inch x 1.8 inch RH 0° lead 32104 HSS ½ inch x 1.8 inch RH 0° lead side cutting 32115 HSS ½ inch x 1.8 inch LH 0° lead side cutting 32345 HSS ½ inch x 2.5 inch RH 15° lead 32343 HSS ½ inch x 2.5 inch RH 0° lead 32341 HSS ½ inch x 2.5 inch RH 0° lead side cutting 32340 HSS ½ inch x 2.5 inch LH 0° lead side cutting 31850 HSS ½ inch x 4.0 inch RH 15° lead double-ended 31841 HSS ½ inch x 4.0 inch RH 0° lead double-ended 32105 HSS ½ inch x 4.0 inch RH 0° lead side cutting 32116 HSS ½ inch x 4.0 inch LH 0° lead side cutting 34348 HSS ½ inch x 4.0 inch LH 15° lead double-ended	
Boring Heads Boring heads may be positioned anywhere along the bar. Split body allows attachment without moving the bar. Boring heads to fit 2.0 inch (50.8 mm) diameter bars also available. 11817 HSS-inch boring head set (included in Base Unit 49003) Has (5) boring heads to bore 4.5 - 12 inch diameter 34565 HSS-metric boring head set (included in Base Unit 49004) Has five boring heads to bore 114.3 - 304.3 mm diameter. Uses standard 10 mm & 12 mm square cutter. 16161 Boring head set Has boring hub and boring head arms to bore 12 - 24 inch (304.8 - 609.6 mm) diameter.		Twin Leadscrew Facing Head Tool Bits 31868 HSS ½ inch x 4.0 inch LH 15° lead 31917 Carbide ½ inch x 3.5 inch LH 15° lead	
Tool Kits Complete set of tools for the boring bar (included in base unit) 28784 Tool Kit (Inch) 34580 Tool Kit (Metric)		Facing/Grooving Tool Facing Bits 31849 HSS ½ inch x 1.8 inch RH 15° lead 31831 HSS ½ inch x 1.8 inch RH 0° lead 36370 1 each of the 15° lead and 0° lead bits	
Tool Holder Kit 56275 Tool Holder Kit Complete set (L/R/neutral) with five 80 degree diamond inserts with ½ inch square shank.		Facing/Grooving Tool Facing Bits 35948 HSS LH grooving 0.12 inches wide, 15° lead top rake 37766 HSS LH grooving 0.12 inches wide, 0° lead top rake 35949 HSS LH grooving 0.56 inches wide, 15° lead top rake 37767 HSS LH grooving 0.56 inches wide, 0° lead top rake	
NOTE: Drawings are for reference only, are not to scale, and may not represent actual product.		* Included in Tool Kit 28784 ** Included in Tool Kit 34580	

ACCESSORIES

Further customize your BB5000 Boring Machine with these boring bar options. Order separately.
(customized bars available upon request)

- All bars are made of 1045 S-CPO chrome-plated steel.
- Standard bars available in 2 foot (609.6 mm) increments up to 24 feet (7.3 meters) long, with various hole spacing.
- After machining, bars are straightened to within 0.001 inches per foot (0.025 per 304.8 mm).
- Bars come packaged in a fitted steel container with quick-release latches.
- First hole is 1 inch (25.4 mm) from the end of the bar, for all bar lengths.
- Morse taper and straight shank holders available upon request.

2.0 inch (50.8 mm) diameter bars available upon request. 6 inch hole spacing is available on longer bars upon request.

Bars with Inch Tooling

Holes spaced every 6 inches (152.4 mm)	Holes spaced every 10 inches (254.0 mm)	Bar Diameter	Bar Length	Hole Size
39309	34626	2-¼ inch (57.2 mm)	48 inches (1219.2 mm)	½ inch
39310	34627	2-¼ inch (57.2 mm)	72 inches (1828.8 mm)	½ inch
41552	34628	2-¼ inch (57.2 mm)	96 inches (2438.4 mm)	½ inch
43728	34629	2-¼ inch (57.2 mm)	120 inches (3048.0 mm)	½ inch
43729	34630	2-¼ inch (57.2 mm)	144 inches (3657.6 mm)	½ inch
39308	37337	1-¼ inch (31.8 mm)	48 inches (1219.2 mm)	⅜ inch
43693	37338	1-¼ inch (31.8 mm)	72 inches (1828.8 mm)	⅜ inch
39447	37339	1-¼ inch (31.8 mm)	96 inches (2438.4 mm)	⅜ inch
n/a	37340	1-¼ inch (31.8 mm)	120 inches (3048.0 mm)	⅜ inch
n/a	37341	1-¼ inch (31.8 mm)	144 inches (3657.6 mm)	⅜ inch
43311	43318	1-¾ inch (44.5 mm)	48 inches (1219.2 mm)	½ inch
43313	43320	1-¾ inch (44.5 mm)	72 inches (1828.8 mm)	½ inch
43314	43321	1-¾ inch (44.5 mm)	96 inches (2438.4 mm)	½ inch
43315	43322	1-¾ inch (44.5 mm)	120 inches (3048.0 mm)	½ inch
43316	43323	1-¾ inch (44.5 mm)	144 inches (3657.6 mm)	½ inch

Bars with Metric Tooling

Holes spaced every 6 inches (152.4 mm)	Holes spaced every 10 inches (254.0 mm)	Bar Diameter	Bar Length	Hole Size
43740	34635	2-¼ inch (57.2 mm)	48 inches (1219.2 mm)	12 mm
43741	34636	2-¼ inch (57.2 mm)	72 inches (1828.8 mm)	12 mm
43742	34637	2-¼ inch (57.2 mm)	96 inches (2438.4 mm)	12 mm
43743	34638	2-¼ inch (57.2 mm)	120 inches (3048.0 mm)	12 mm
43744	34639	2-¼ inch (57.2 mm)	144 inches (3657.6 mm)	12 mm
43687	37327	1-¼ inch (31.8 mm)	48 inches (1219.2 mm)	10 mm
43686	37328	1-¼ inch (31.8 mm)	72 inches (1828.8 mm)	10 mm
43685	37329	1-¼ inch (31.8 mm)	96 inches (2438.4 mm)	10 mm
n/a	37330	1-¼ inch (31.8 mm)	120 inches (3048.0 mm)	10 mm
n/a	37331	1-¼ inch (31.8 mm)	144 inches (3657.6 mm)	10 mm
43298	43305	1-¾ inch (44.5 mm)	48 inches (1219.2 mm)	12 mm
43307	43300	1-¾ inch (44.5 mm)	72 inches (1828.8 mm)	12 mm
43301	43308	1-¾ inch (44.5 mm)	96 inches (2438.4 mm)	12 mm
43302	43309	1-¾ inch (44.5 mm)	120 inches (3048.0 mm)	12 mm
43303	43310	1-¾ inch (44.5 mm)	144 inches (3657.6 mm)	12 mm

A Wide Variety of Applications

Do you need to put the axial feed unit on one end of the bar and the rotational drive on the other? No problem... all you need to do is use the leadscrew block clamped or tack welded to the work piece. In fact, just about any arrangement of components can be used as long as you maintain rigidity by placing bearing supports as close as possible to the holes to be bored. Need to align and multiple holes? Just use a long bar and weld a bearing bracket at each hole for support or use optical alignment for easy & precise setup over long distances. Modular components let you use the machine in a wide variety of combinations.

The BB5000 is widely used by these industries:


- Construction
- Mining
- Power Generation
- Ship building
- Transportation
- Petrochemical
- Pulp and paper
- Steel and aluminum

Typical applications:

- Heavy equipment repair
- Stern tube boring
- Wicket gate repair on dams
- Bridge building/re-building
- Turbine coupling boring
- Engine block repair
- Bearing seat repair
- Press repair
- Valve body boring
- Pump body boring
- Large fab bore alignment




APPLICATION PHOTOS

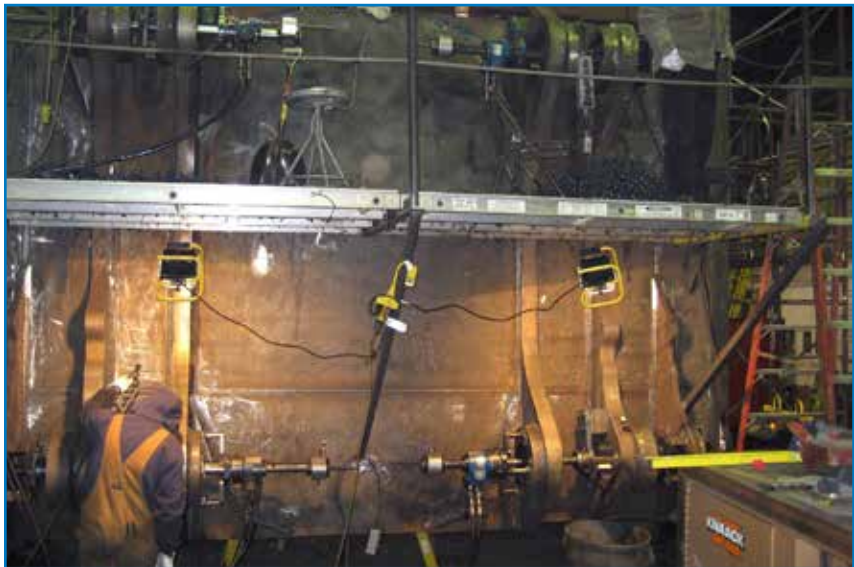


Typical applications:


Whether it's conventional boring, line boring, drilling, facing or grooving, the CLIMAX BB5000 has you covered. With versatile setup & machining options, it's the machine you need to get all your toughest jobs done when and where you need it. Typical applications illustrated below.

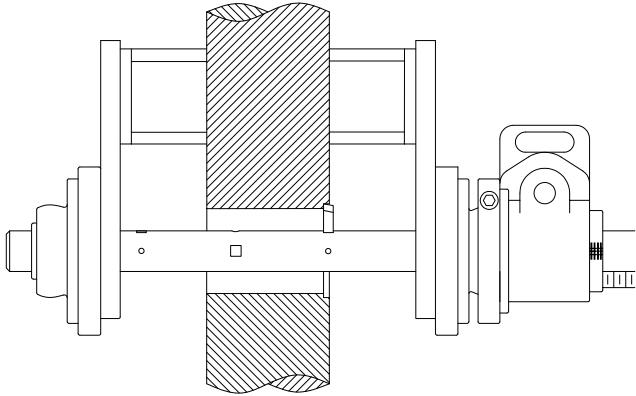


Conventional Boring

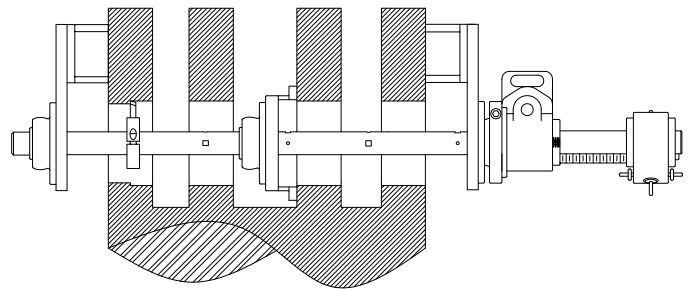


Line Boring

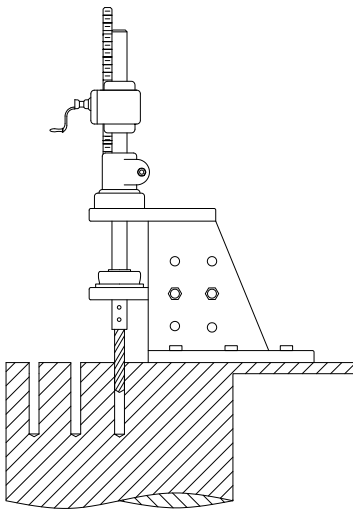

Drilling

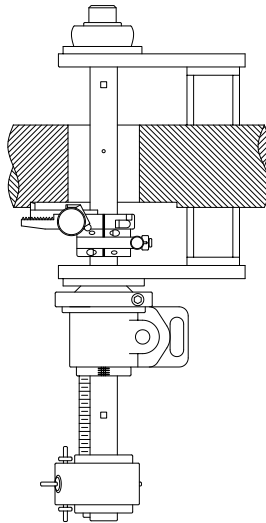

Facing

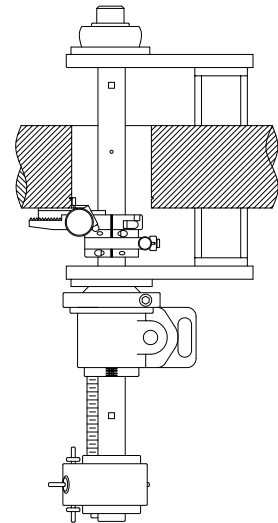

Grooving

NOTE: Drawings are for reference only, are not to scale, and may not represent actual product.

CLIMAX Training Facilities

CLIMAX has been teaching the fundamentals and finer points of portable machine tool operation for more than 50 years.

Whether it's a regularly scheduled course at one of our seven Global Training Centers or a custom curriculum conducted with your team, at your facility, your technicians will benefit from courses developed by the most experienced and respected professionals in the business.

Regularly scheduled courses in basic and advanced tool operation are available. A vast majority of every program is devoted to hands-on activities, skills development, and OEM Certification covering the following subject matters: operator safety, tool component review, setup and mounting, standard and advanced operational techniques, overview of cutting tools and recommended usage, and maintenance procedures.




Training is available at the following seven Global Training Centers:

- Portland, Oregon
- Houston, Texas
- Gonzales, Louisiana
- Wadsworth, Ohio
- Manchester, United Kingdom
- Düren, Germany
- Dubai, United Arab Emirates

Call us today to schedule training for your team! ,



CLIMAX GLOBAL LOCATIONS

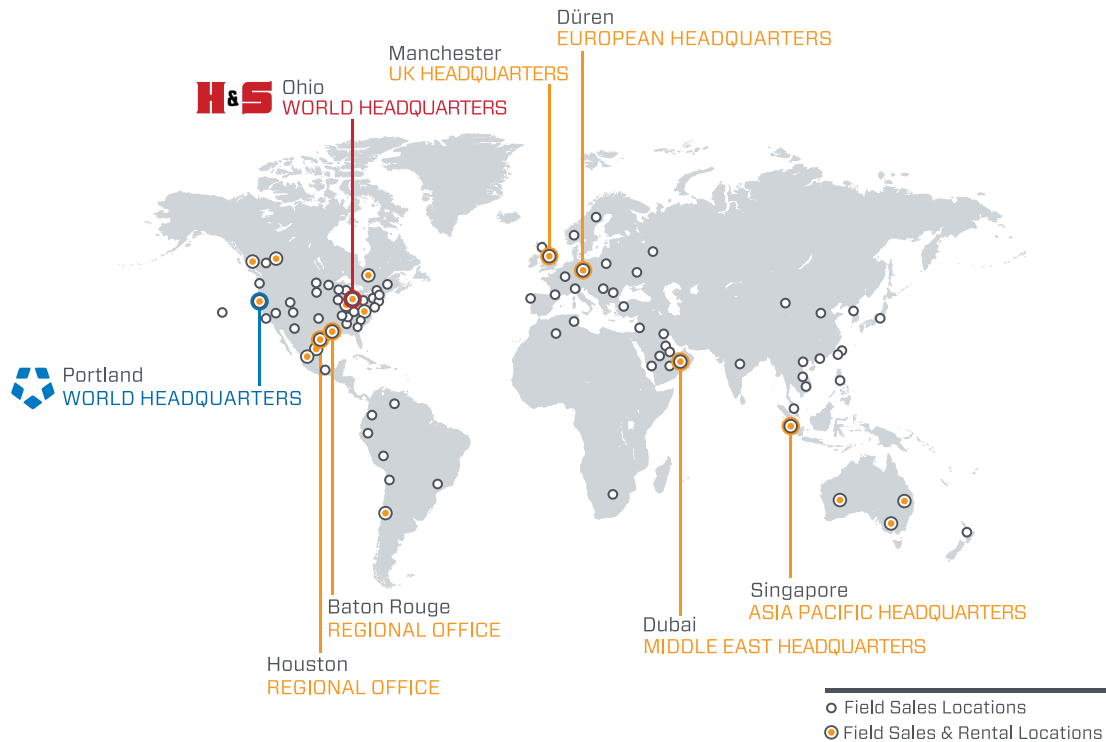

Call CLIMAX for:

Rentals

With 21 worldwide rental depot locations, you are never far away from a CLIMAX tool.

On-site Training

Need some refresher courses in setting up and operating your CLIMAX machine tool?

Custom Projects

CLIMAX has been solving complicated machining, welding and valve testing problems for our customers since 1964.

Connect with us:



H&S World Headquarters - USA

Address: 715 Weber Dr., Wadsworth, Ohio 44281
Tel: +1 330 336 4550
Fax: +1 503 538 7600
Email: info@hstool.com

CLIMAX World Headquarters - USA

Address: 2712 E. 2nd St, Newberg, Oregon 97132
Tel: +1 503 538 2185
Fax: +1 503 538 7600
Email: info@cpmt.com

Asia Pacific

Address: 308 Tanglin Rd #02-01, Singapore 247974
Tel: +65 6801 0662
Fax: +65 6801 0699
Email: ClimaxAsia@cpmt.com

European

Address: Am Langen Graben 8, 52353 Düren, Germany
Tel: (+49) (0) 2421 9177 0
Fax: (+49) (0) 2421 9177 29
Email: ClimaxEurope@cpmt.com

Middle East

Address: Warehouse #5, Plot: 369 272, Um Sequim Road, Dubai, UAE
Tel: +971 4 321 0328
Email: ClimaxUAE@cpmt.com

United Kingdom

Address: Unit 7 Castlehill Industrial Estate, Bredbury Industrial Park, Horsfield Way, Stockport SK6 2SU
Tel: +44 (0) 161 406 1720
Email: info@cpmt.com